

# Single Pole Lite


Cat. No. SPL

Cat. No. SPL/R



A single spotlight which can be aimed in any direction. The fitting has a fully adjustable arm allowing 360 degree rotation and 0 - 90 degree elevation. The Single Pole Lite is ideal for path lighting as well as tree lighting, or the head may be aimed downward to eliminate vertical light.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 240/12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer, this changes the luminaire to an IP56 rating.

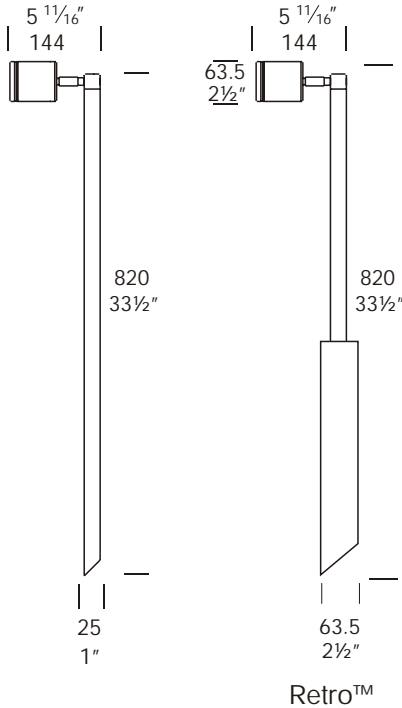

## Ordering Information

### Luminaire Type

SPL - Single Pole Lite

### Material/Finish

BK - Black  
 BZ - Bronze  
 GN - Green  
 MS - Metallic Silver  
 WH - White

COP - Copper  
 SS - 316 Stainless Steel

### Accessories

CJK150 - CJK150 Cable Joint Kit  
 DFL - Frost Lens  
 GG - Glare Guard  
 HCL - Hex Cell Louvre Adaptor  
 /R - Retro™ Transformer  
 240/12 volt  
 SSP/G - Hunza® Super Spike

Ordering Example: SPL SS - Single Pole Lite in 316 Stainless Steel

SPL/R COP - Single Pole Lite Retro™ in Copper

HCL - Hex Cell Louvre Adaptor  
 (Accessories ordered separately)



Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.  
 USA: Ph. 310 560 7310 Fax. 1 877 692 4589.  
 hunza@hunza.co.nz www.hunza.co.nz  
 Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.  
 3237 Long Island St, W. Sacramento, California 95691, USA.  
 Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

## Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.  
End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat - Colours Black, Bronze, Green, Metallic Silver, White.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

Stainless steel 316 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Poles: Aluminium, Copper, 316 Stainless 25.4mm (1") x 850mm (33½") tube.

Retro™: Pole - 25.4mm (1") x 410mm (16") tube.

Transformer Pole 63.5mm (2½") x 440mm (17½").

## Mounting

Pole 850mm (33½") directly mounted into the earth or for extra stability in sand or loose ground use a Hunza® Super Spike. Retro™ - set in concrete.

## Features

### Lens:

3mm (1/8") clear tempered shatter resistant glass. Life Time Warranty.

### Gaskets:

Silicone, iron impregnated 220°C (428°F).

### Lamp Holder:

GU 5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

### Accessories:

Cable Joint Kit (Cat. CJK 50).

Not approved for USA /Canada.

Hunza® Super Spike, not Retro™ option (Cat. SSP/G).

Frosted Lens (Cat. DFL).

Glare Guard (Cat. GG)

Hex Cell Louvre Adaptor (Cat. HCL)

Retro™ transformer 240/12 volt (Cat. /R) IP56.

### Swivel :

Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires 360° rotation and 0 - 90° elevation, full stainless steel construction.

## Standards

IP56 / IP66  UL1838

## Luminaire Weight

**12 volt:** Alum .655kg (1lb 7oz)  
Cop 2.140kg (4lb 11oz)  
SS 1.620kg (3lb 9oz)  
**Retro™:** Alum 2.000kg (4lb 6oz)  
Cop 3.200kg (7lb )  
SS 3.055kg (6lb 11oz)

## Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

## RETRO™ IP56

HUNZA® 240/12 volt ac silicone encapsulated electronic transformer is built into the pole. Dimmable with a suitable leading edge dimmer.

## USA and Canada

HUNZA® Wall Mount Transformer: not included.










## Luminaire: supplied with

MR16 GU5.3 20, 35, 50 watt lamp max.  
**Retro™** MR16 GU5.3 20, 35, 50 watt lamp max.

## USA and Canada

MR16 GU5.3 20 watt lamp.

When glare guard fitted lamp wattage can be increased to 35 watt.

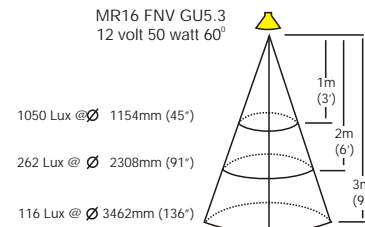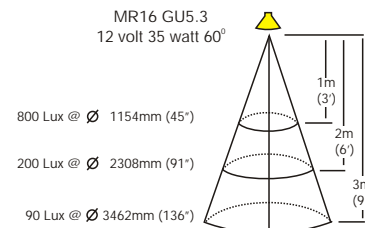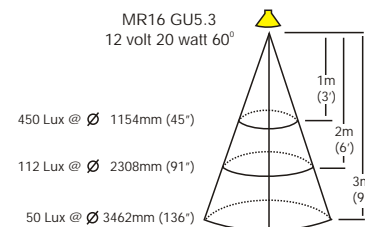

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.  
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.  
hunza@hunza.co.nz www.hunza.co.nz  
Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.  
3237 Long Island St, W. Sacramento, California 95691, USA.  
Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd