

# Step Lite Eyelid



Cat. No. SLE

Cat. No. SLEfl



Eyelid Step Lite eliminates all upward light. When using stairs there is no blinding glare or sparkle from the lamp to irritate the eyes. The eyelid is secured to the flange by two screws. When a canister is used there are no mounting holes in the flange.

A 240 volt fluorescent option is available which offers excellent light output, low energy usage and very low heat generation, this changes the luminaire to an IP66 rating.

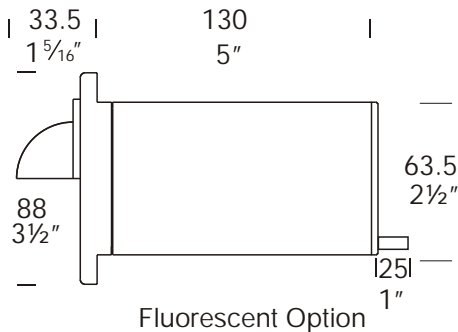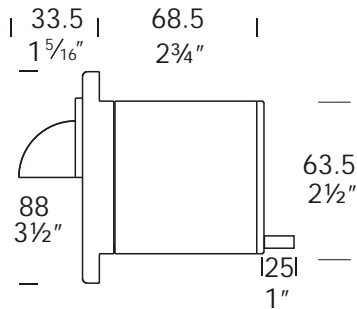

## Ordering Information

Luminaire Type	Material/Finish	Accessories
SLE - Step Lite Eyelid	BK - Black BZ - Bronze GN - Green WH - White MS - Metallic Silver  COP - Copper	CJK150 - Cable Joint Kit HCL - Hex Cell Louvre Adaptor DFL - Frosted Lens FL - Fluorescent Option Canss - 316 Stainless Steel Canister Flucan - Fluorescent Canister PVC Scan - Step Lite Canister
Ordering Example	SLEfl COP - Step Lite in Copper with Fluorescent Option	
	HCL MS - Hex Cell Louvre in Metallic Silver <i>(Accessories ordered separately)</i>	



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.  
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.  
hunza@hunza.co.nz www.hunza.co.nz  
Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.  
3237 Long Island St, W. Sacramento, California 95691, USA.  
Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

## Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.  
End cap - solid aluminium 63.5mm (2½") rod, flange 90mm (3½") solid aluminium rod with chromate substrate and high UV resistant polyester powder coat -

Colours Black, Bronze, Green, Metallic Silver, White.

Copper: 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

Flange 90mm (3½") solid copper rod.

## Mounting

Designed to fit through a 66mm (2 5/8") hole and be fixed into position by two screws in the flange or a Step Lite canister (see accessories) can be used which maintains the aesthetic look of the flange by eliminating the two screw holes in the flange.

## Features

### Lens:

3mm (1/8") thick clear tempered shatter resistant glass.

Life Time Warranty.

### Gaskets:

Silicone, iron impregnated 220°C (428°F).

### Lamp Holder:

GU 5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

### Fluorescent

E27 PET 210° (410°F) base mount.

### Accessories:

Cable Joint Kit (Cat. CJK 50)  
Not approved for USA /Canada.

Fluorescent Option 5 watt 240 volt (Cat. FL) IP66.

Fluorescent Canister, PVC (Cat. Flucan).

Frosted Lens (Cat. DFL).

Hex Cell Louvre Adaptor (Cat. HCL).

Step Canister (Cat. Slcan).

316 Stainless Canister for use in lime stone etc. (Cat. Canss).

## Standards

IP66 / IP68



UL1838

## Luminaire Weight

12 volt

Alum .475kg (1lb)  
Cop 1.390kg (3lb 1oz)

## Fluorescent IP66

Alum .790kg (1lb 11oz)  
Cop 2.325kg (5lb 2oz)

## Power Supply

HUNZA® Inground or Wall Mount  
Transformer: not included.

## USA and Canada:

HUNZA® Wall Mount Transformer:  
not included.

## Luminaire: supplied with

### Halogen

MR16 GU5.3 - 20 watt lamp max.



### Fluorescent

E27 - 240 volt 5 watt self ballasted  
lamp.

## USA and Canada:

MR16 GU5.3 20 watt lamp max.

Step Lite Eyelid MR16 BAB 20 watt lamp - Lens height 400mm (15¾")

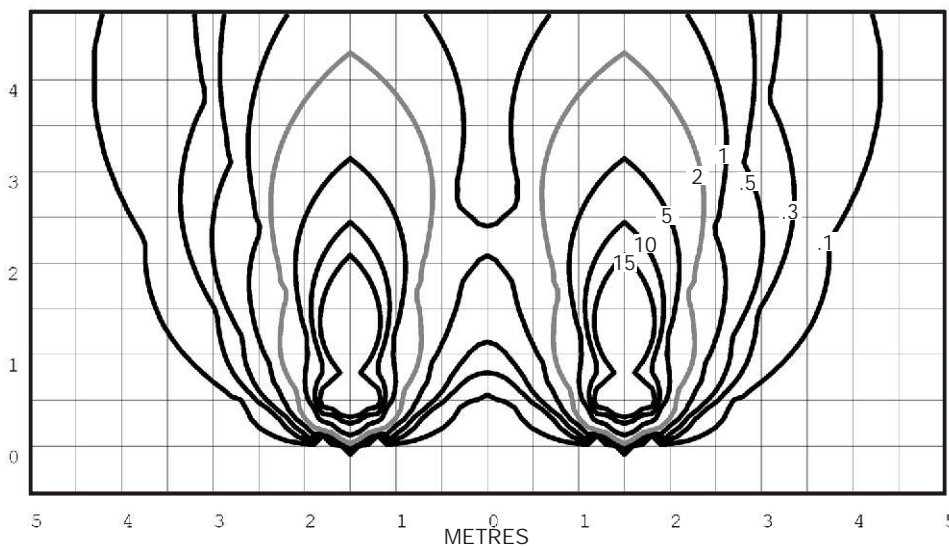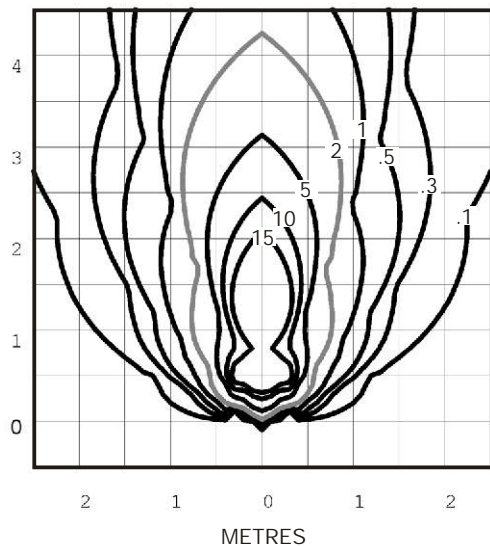

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.  
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.  
hunza@hunza.co.nz www.hunza.co.nz  
Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.  
3237 Long Island St, W. Sacramento, California 95691, USA.  
Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd