



# Step Lite Louvre Square

Cat. No. SLLUsq  
Cat. No. SLLUflsq



This luminaire has an 88mm (3½") Square flange with a flush to the surface look with no protrusions. When using stairs there is no blinding glare or sparkle from the 20 watt lamp to irritate the eyes.

A 240 volt fluorescent option is available which offers excellent light output, low energy usage and very low heat generation, this changes the luminaire to an IP66 rating.

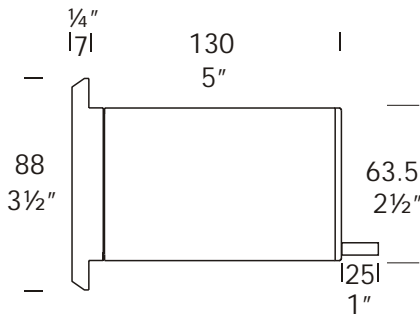

Fluorescent Option

## Ordering Information

Luminaire Type	Material	Accessories
SLLUsq - Step Lite Louvre Square	COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit DFL - Frosted Lens FL - Fluorescent Option Slcan - Step Lite Canister Flucan - Fluorescent Canister PVC Canss - 316 Stainless Steel Canister
<p>Ordering Example SLLUsq SS - Step Louvre Square in 316 Stainless Steel</p> <p>SLLUFLsq COP - Step Louvre Square in Copper with Fluorescent Option</p>		<p>CJK150 - Cable Joint Kit</p> <p>(Accessories ordered separately)</p>



Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.  
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.  
hunza@hunza.co.nz www.hunza.co.nz  
Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.  
3237 Long Island St, W. Sacramento, California 95691, USA.  
Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

### Luminaire Construction

CNC machined from one of the following metals:

Copper: 63.5mm (2½") x 10.5mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

Flange 90mm x 90mm (3½" x 3½") bar.

316 Stainless steel: 9mm (11/32").

End cap - solid 316 stainless steel 63.5mm (2½") rod.

Flange 90mm x 90mm (3½" x 3½") bar.

### Mounting

Designed to fit through a 66mm (2 5/8") hole and be fixed into position by two screws in the flange or a Step Lite canister (see accessories) can be used which maintains the aesthetic look of the flange by eliminating the two screw holes in the flange.

### Features

#### Lens:

3mm (1/8") thick clear tempered shatter resistant glass.

Life Time Warranty.

#### Gaskets:

Silicone, iron impregnated 220°C (428°F).

#### Lamp Holder:

GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

#### Fluorescent

E27 PET 210° (410°F) base mount.

#### Accessories:

Cable Joint Kit (Cat. CJK 50)  
Not approved for USA /Canada.

Fluorescent Option 5 watt 240 volt (Cat. FL) IP66.

Fluorescent Canister, PVC (Cat. Flucan).

Frosted Lens (Cat. DFL).

Step Canister (Cat. Sican).

316 Stainless Canister for use in lime stone etc. (Cat. Canss).

### Standards

IP66 / IP68



UL1838

### Luminaire Weight

#### 12 volt

Cop 1.350kg (2lb 15oz)

SS 1.040 (2lb 4oz)

#### Fluorescent IP66

Cop 2.300kg (5lb 1oz)

SS 1.675 (3lb 11oz)

### Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

#### USA and Canada:

HUNZA® Wall Mount Transformer: not included.

### Luminaire: supplied with

#### Halogen

MR16 GU5.3 20watt lamp max.



#### Fluorescent

E27 - 240 volt 5 watt self ballasted lamp.

#### USA and Canada:

MR16 GU5.3 20 watt lamp max.

Step Lite Louvre Square Lux MR16 BAB 20 watt lamp - Lens height 400mm (15¾")

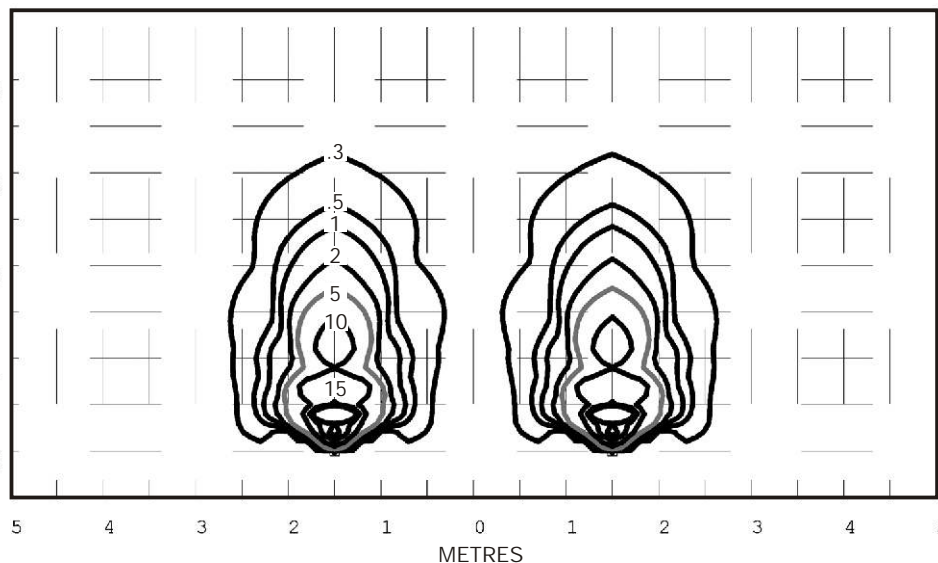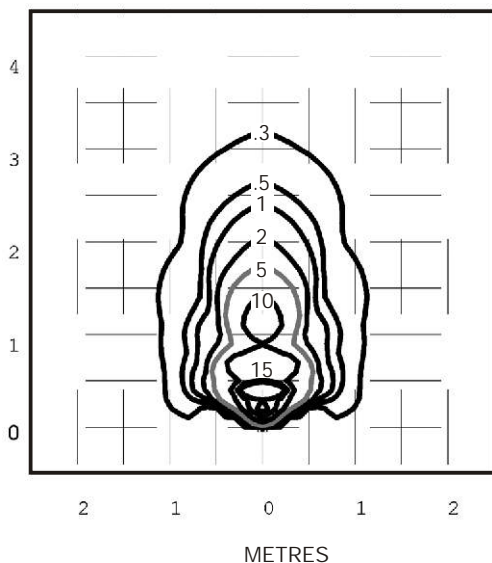

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.  
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.  
hunza@hunza.co.nz www.hunza.co.nz  
Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.  
3237 Long Island St, W. Sacramento, California 95691, USA.  
Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd