

# Step Lite

## Louvre

Cat. No. SLLU



Cat. No. SLLUfl



HUNZA®

This luminaire has a flush to the surface look with no protrusions. When using stairs there is no blinding glare or sparkle from the 20 watt lamp to irritate the eyes.

A 240 volt fluorescent option is available which offers excellent light output, low energy usage and very low heat generation, this changes the luminaire to an IP66 rating.

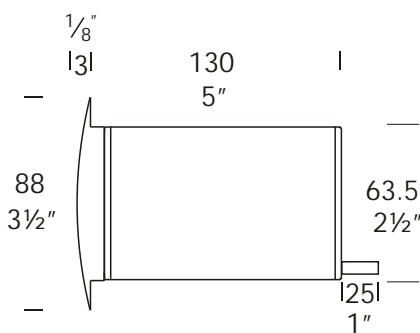

Fluorescent Option

### Ordering Information

#### Luminaire Type

SLLU - Step Lite Louvre

#### Material

COP - Copper  
SS - 316 Stainless Steel

#### Accessories

CJK150 - Cable Joint Kit  
DFL - Frosted Lens  
FL - Fluorescent Option  
Flucan - Fluorescent Canister PVC  
Sscan - Step Lite Canister  
Canss - 316 Stainless Steel Canister

Ordering Example SLLU COP - Step Lite Louvre in Copper  
SLLUFL SS - Step Lite Louvre in 316 Stainless Steel with fluorescent option

DFL - Frosted Lens

(Accessories ordered separately)



Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

### Luminaire Construction

CNC machined from one of the following metals:

Copper: 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.  
Flange 90mm (3½") solid copper rod.

316 Stainless steel: 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.  
Flange 90mm (3½") solid 316 stainless steel rod.

### Mounting

Designed to fit through a 66mm (2 5/8") hole and be fixed into position by two screws in the flange or a Step Lite canister (see accessories) can be used which maintains the aesthetic look of the flange by eliminating the two screw holes in the flange.

### Features

**Lens:**  
3mm (1/8") thick clear tempered shatter resistant glass.

Life Time Warranty.

**Gaskets:**  
Silicone, iron impregnated 220°C (428°F).

**Lamp Holders:**  
GU 5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

**Fluorescent**  
E27 PET 210° (410°F) base mount.

### Accessories:

Cable Joint Kit (Cat. CJK 50)  
Not approved for USA /Canada.

Frosted Lens (Cat. DFL).

Fluorescent Canister, PVC (Cat. Flucan).

Fluorescent Option 5 watt 240 volt (Cat. FL) IP66.

Step Canister (Cat. Slcan).

316 Stainless steel Canister for use in lime stone etc. (Cat. Canss).

### Standards

IP66 / IP68



UL1838

### Luminaire Weight

**12 volt**  
Cop 1.100kg (2lb 6oz)  
SS 1.055kg (2lb 5oz)

**Fluorescent IP66**  
Cop 2.015kg (4lb 7oz)  
SS 1.690kg (3lb 11oz)

### Power Supply

HUNZA® Inground or Wall Mount  
Transformer: not included.

### USA and Canada:

HUNZA® Wall Mount Transformer:  
not included.

### Luminaire: supplied with

#### Halogen

MR16 GU5.3 20watt lamp max.



#### Fluorescent

E27 - 240 volt 5 watt self ballasted lamp.

### USA and Canada:

MR16 GU5.3 20 watt lamp max.

Step Lite Louvre Lux MR16 BAB 20 watt lamp - Lens height 400mm (15¾")

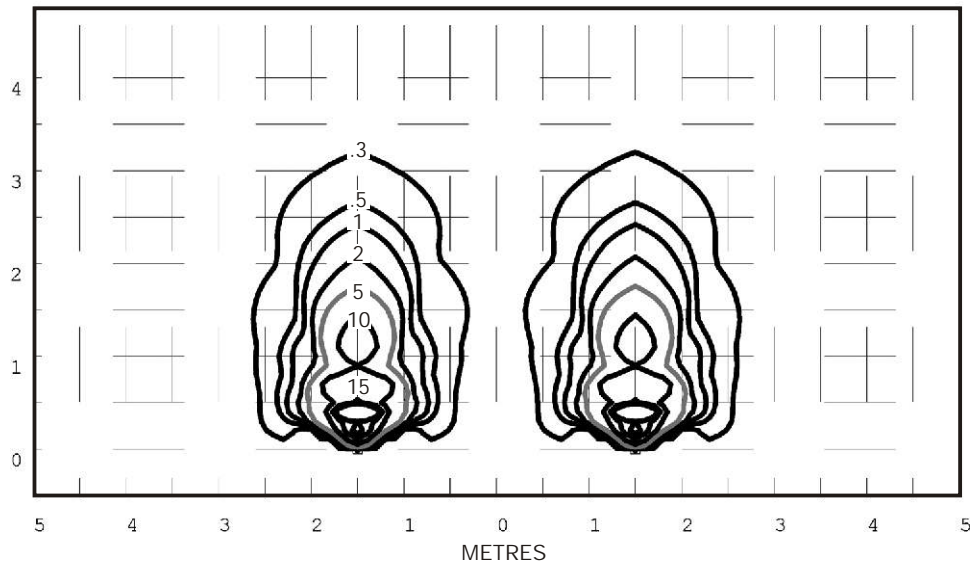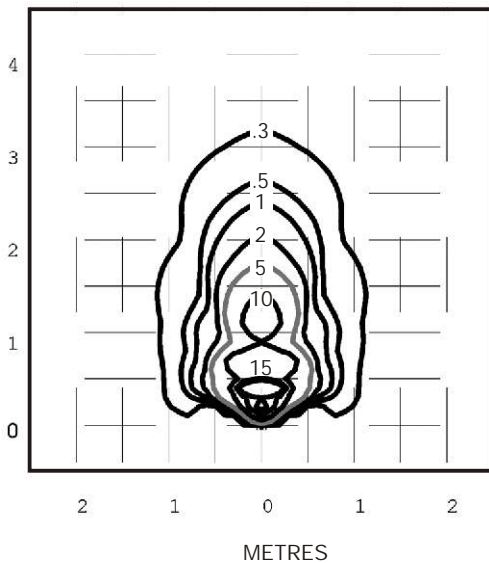

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.  
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.  
hunza@hunza.co.nz www.hunza.co.nz  
Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.  
3237 Long Island St, W. Sacramento, California 95691, USA.  
Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd