

Step Lite

Cat. No. SL

Cat. No. SLfl


Cat. No. SLLED



Step Lite is designed with a 88mm (3½") flange for flush mounting into masonry, stone or wood. For illumination of steps and ground level horizontal lighting, for example, across driveways or exterior paved areas. When a canister is used there are no mounting holes in the flange.

A 240 volt 5 watt fluorescent option is available which offers excellent light output, low energy usage and very low heat generation, this changes the luminaire to an IP66 rating.

Ordering Information

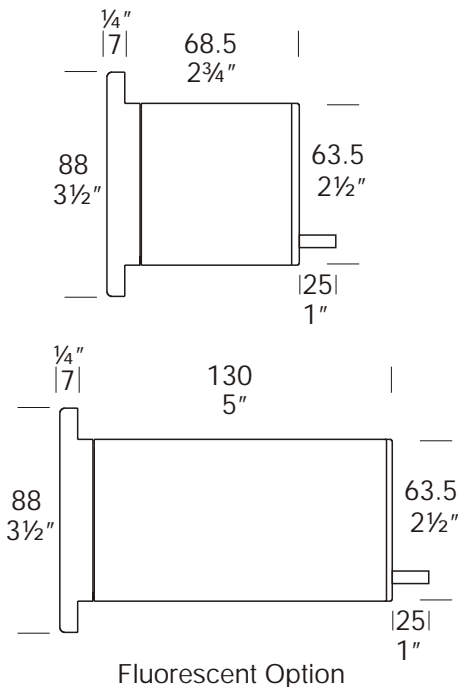

Luminaire Type

SL Step Lite

Material/Finish

BK - Black
 BZ - Bronze
 GN - Green
 MS - Metallic Silver
 WH - White

 COP - Copper
 SS - 316 Stainless

Accessories

CJK150 - Cable Joint Kit
 DFL - Frosted Lens
 FL - Fluorescent Option
 HCL - Hex Cell Louvre Adaptor
 LED - LED Array
 /TLED - Electronic LED Transformer (installed inside luminaire)
 Canss - 316 Stainless Steel Canister
 Flucan - Fluorescent Canister
 Slcan - Step Lite Canister

Ordering Example: SL COP - Step Lite in copper.
 SL MSLED - Step Lite in Metallic Silver with LED

 HCL COP - Hex Cell Louvre Adaptor in copper.
 (Accessories ordered separately)



Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
 USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
 hunza@hunza.co.nz www.hunza.co.nz
 Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.
 3237 Long Island St, W. Sacramento, California 95691, USA.
 Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2½") rod, flange 90mm (3½") solid aluminium rod with chromate substrate and high UV resistant polyester powder coat -

Colours Black, Bronze, Green, Metallic Silver, White.

Copper: 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.
Flange 90mm (3½") solid copper rod.

316 Stainless steel: 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.
Flange 90mm (3½") solid 316 stainless steel rod.

Mounting

Designed to fit through a 66mm (2 5/8") hole and be fixed into position by two screws in the flange or a Step Lite canister (see accessories) can be used, which maintains the aesthetic look of the flange by eliminating the two mounting holes in the flange.

Features

Lens:

3mm (1/8") thick clear tempered shatter resistant glass.
Life Time Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holders:

GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Fluorescent

E27 PET 210° (410°F) base mount.

Accessories:

Cable Joint Kit (Cat. CJK 50)
Not approved for USA /Canada.

Fluorescent Option 5 watt 240 volt (Cat. FL) IP66.

Fluorescent Canister, PVC (Cat. Flucan).

Frosted Lens (Cat. DFL).

Hex Cell Louvre Adaptor (Cat. HCL).

LED Array (Cat. LED). Red, Green, Blue, Yellow and White

LED Electronic Transformer 100 - 240volt 6va. for inside the luminaire (Cat /TLED).

Step Canister (Cat. Slcan).

316 Stainless Canister for use in lime stone etc. (Cat. Canss).

Standards

IP66 / IP68



UL1838

Luminaire Weight

12 volt

Alum .465kg (1lb)
Cop 1.340kg (2lb 15oz)
SS 1.055kg (2lb 5oz)

Fluorescent IP66

Alum .780kg (1lb 11oz)
Cop 2.275kg (5lb)
SS 1.690kg (3lb 11oz)

Power Supply

HUNZA® Inground or Wall Mount
Transformer: not included.
HUNZA® H20/24LED: not included.
HUNZA® IG20/24LED: not included
Electronic transformer 100 - 240
volt 50/60Hz. 24 d.c. 6va: not
included.

USA and Canada:

HUNZA® Wall Mount Transformer:
not included.
Electronic transformer 100 - 240
volt 50/60Hz. 24 volt d.c. 6va: not
included.

Luminaire: supplied with Halogen

MR16 GU5.3 20 watt lamp max.

Fluorescent

E27 - 240 volt 5 watt self ballasted
lamp.

LED




LED Array 24 volt d.c. 1.2 watt.

USA and Canada:

MR16 GU5.3 20 watt lamp max.

LED

LED Array 24 volt d.c. 1.2 watt.

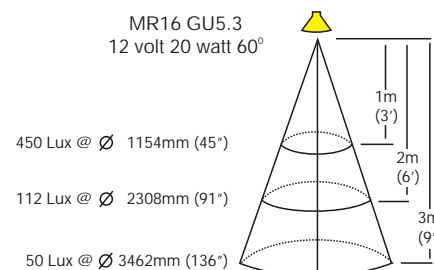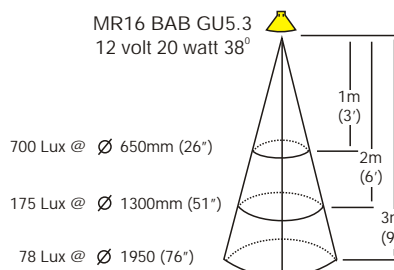

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
hunza@hunza.co.nz www.hunza.co.nz
Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.
3237 Long Island St, W. Sacramento, California 95691, USA.
Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd