

# Mouse Lite™ Square


Cat. No. MOUSESQbz

Cat. No. MOUSESQss



The Mouse Lite™ Square is a solid bronze or solid 316 stainless steel luminaire for surface mounting. A space in the wall behind the luminaire is not required for cable connection due to the design that includes a cable connection junction cavity. There is no light directed upward or forward into the eye.

The Retro™ is a 110/240 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting.

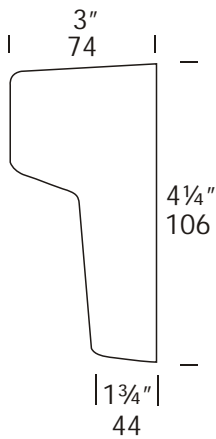

## Ordering Information

### Luminaire Type

MOUSESQ - Mouse Lite Square

### Flange Option

BZ - Bronze  
SS - 316 Stainless Steel

### Accessories

CJK150 - Cable Joint Kit



Ordering Example MOUSESQ SS - Mouse Lite Square in 316 Stainless Steel

MOUSESQ/R BZ - Mouse Lite Square Retro™ in Bronze

*(Accessories ordered separately)*



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd

### Luminaire Construction

CNC finished machined from one of the following metals:

Investment cast in bronze with forged brass mounting plate.

Investment cast in 316 stainless steel with investment cast 316 stainless steel mounting plate.

### Mounting

Mounted using two countersunk phillips head screws directly into the mounting surface.

### Features

#### Lens:

2mm (3/32") frosted tempered shatter resistant glass.

Life Time Warranty.

#### Gasket:

Nyrol 150°C (302°F).

#### Lamp Holder:

GU4 - 350°C (662°F) ceramic multi contact lamp holder with 180°C (356°F) silicone cables.

#### Accessories:

Cable Joint Kit (Cat. CJK 50)  
Not approved for USA /Canada.

Retro™ transformer 110/240 volt (Cat. /R).

### Standards

IP66  UL1838

### Luminaire Weight

12 volt BZ .820kg (1lb 12oz)

SS .750kg (1lb 10oz)

Retro™ BZ .920kg (2lb)

SS .850kg (1lb 13oz)

### Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

### USA and Canada:

HUNZA® Wall Mount Transformer: not included.

### RETRO™

HUNZA 110/240 volt ac silicone encapsulated electronic transformer built into the base.

Dimmable with a suitable leading edge dimmer.

### Luminaire: supplied with

GU4 5, 10, 20 watt lamp max.



Retro™ GU4 10, 20 watt lamp max.

### USA and Canada:



GU4 5, 10 watt lamp max.

Retro™ GU4 5, 10 watt lamp max.

Mouse Lite Square 10 watt GU4 Bi-Pin lamp - Lens height 400mm (15¾")

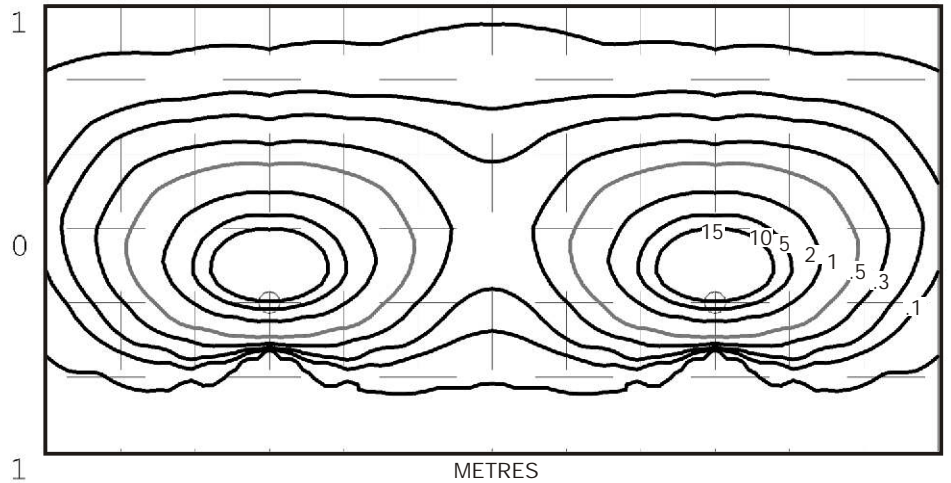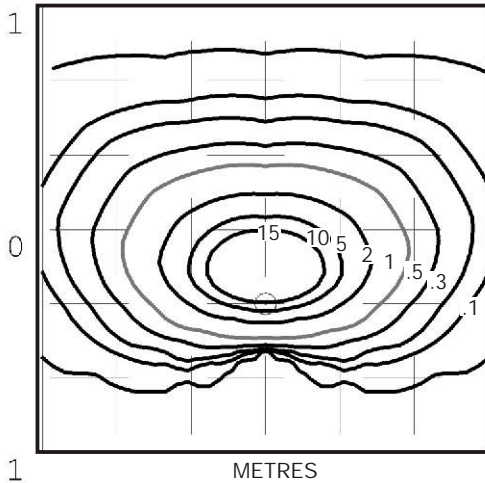

Mouse Lite Square 20 watt GU4 Bi-Pin lamp - Lens height 400mm (15¾")

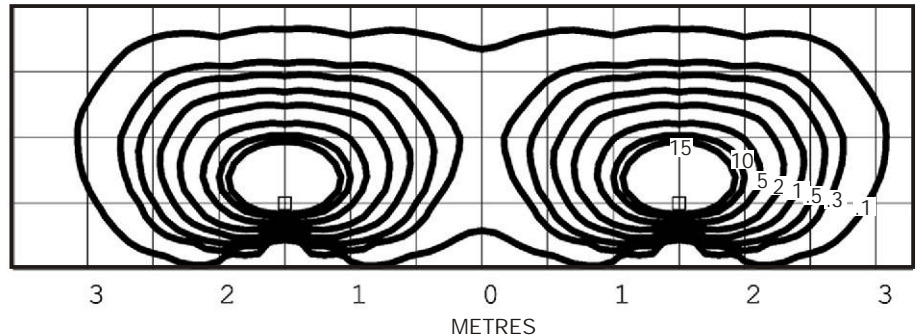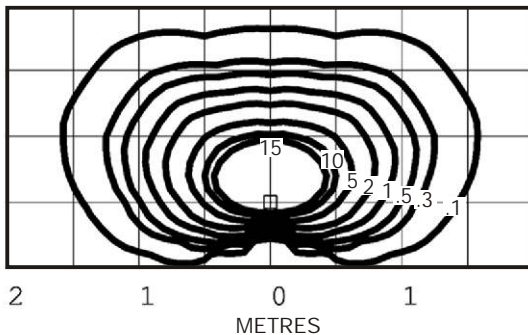

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Matthew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2003 Hunza Holdings Ltd